


SI Radar Gun to CAT-5 cable

Male on gun, Cat-5 on display




Cat-5 Connector	Signals	DB9 Connector
1 - BN	1 - +V	BN - DB9-4
2 - WH/BN	2 - Gnd	WH/BN - DB9-5
3 - GN	3 - +V or Data-P	GN - Not connected
4 - WH/BL	4 - Data-N	WH/BL - Connect to DB9-3
5 - BL	5 - Data-P	BL - Connect to DB9-5
6 - WH/GN	6 - Gnd or Data-N	WH/GN - Not connected
7 - OR	7 - +V	OR - DB9-4
8 - WH/OR	8 - Gnd	WH/OR - DB9-5


CAT-5 cable, 25ft long

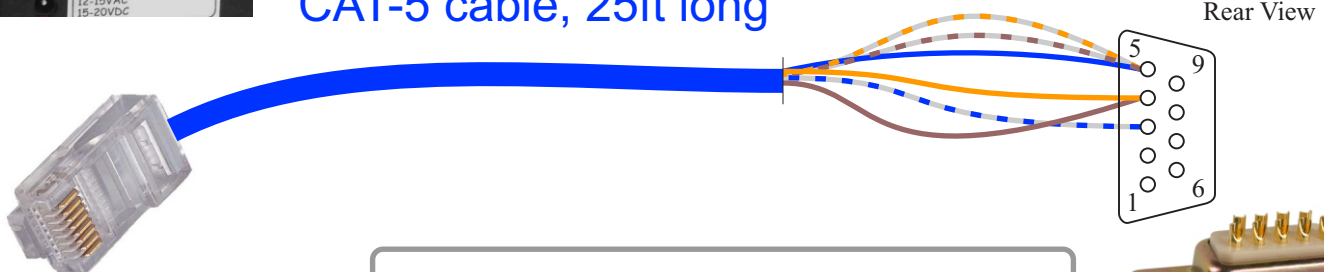

Connect to RX422 input on display

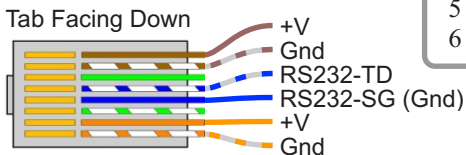

Charger DB-9	DB-9	SI Gun DB-9
1 -	1 -	1 -
2 - Data To Gun	2 - RD	2 - Pair 1 - Black
3 - Data From Gun	3 - TD	3 - Pair 1 - White
4 - 10-13VDC Power	4 - DTR	4 - Pair 2 - Red
5 - Ground	5 - SG	5 - pair 2 - Black and Shield
6 - Power Enable		



Connect to SI Gun

Alzatex, Inc
 6400 SW 213th Ave
 Aloha, OR 97007
www.alzatex.com
terryl@alzatex.com
 503 642-9693



Alzatex Part Number:

RADAR-SI-25F-CAT5

Designed by Terry Lang